



### 34—Hall Seat

An eighth grade or high school problem. Make of hard pine, poplar or chestnut unless oak is desired. If poplar or pine is used some good stain that does not need a fixative preparation over it will answer all requirements. The design may be varied by using slats on ends and back instead of the two back boards as shown. If the seat is upholstered with leather or its imitation, pantasote, allowing a border of the wooden seat about two inches wide to show all around the upholstery, the piece will be somewhat improved in appearance.



### 35—Hall Seat

A high school problem offering an opportunity for some wood turning. The chest portion of the seat might be made by using solid rather than paneled sides and ends. In any case these should be grooved into the legs. The seat will look best perhaps when made of some hard wood and finished by the process of staining, filling and varnishing. The turned parts should be finished while in the lathe if varnish is used, in order that it may be properly rubbed down.

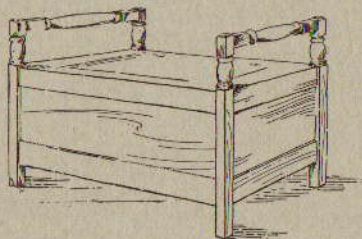

# HALL SEAT

